
Purpose Built For Extreme Operation

Prower

Speed... Range...Endurance...



MULTIPLE MISSION CONFIGURABLE

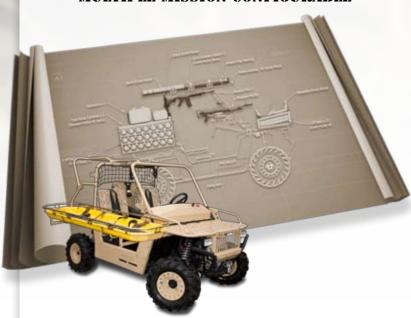

Prowler KII LTATV-VLSV

Prowler is the only Light Tactical All Terrain Vehicle (LTATV) built from the ground up to provide the military with an agile, powerful and stable multi-application platform. Prowler's purpose-driven design, uncompromising quality materials and rugged construction have made it the deployment choice of field operators worldwide.




PROWLER KII

Standard Platform

TECHNICAL SPECIFICATIONS

Part Number: PWLR2-STD

(Standard Platform Configuration Unless Specified As Optional)



Power TrainFully Automatic with Hi/Lo Range 2WD/4WD, Neutral, Reverse and Park 4WD Differential LockConstructionTubular Steel Structure, Chromalloy Steel ROPS and Cargo Racks, Full Coverage Skid Plate System

Operation Standard Automotive Driver Controls with Sealed Rack and Pinion Steering,

Console Mounted Switch Selectable Dual Range Drive, (Optional Power Steering)

Speed 50 mph (4WD, Hi Range) Governed

Suspension Front and Rear Independent Double Wishbone A Arms, Adjustable Preload Gas Charged

Shock Absorbers. (Optional Heavy Duty Extended Range)

Braking Front - Dual Hydraulic Disc, Rear - Sealed Multi Disc

Full Engine Braking on all 4 Drive wheels

Instrumentation Digital Multifunction Display with LCD Speedometer / Odometer, Dual Trip Meters, Hour Meter

and Clock, Fuel Gage, Warning Lights and Drive Train Position Indicators

Electrical 12VDC Standard, Optional 24VDC Auxiliary System

Battery Terminal Posts External Jumper Remote Access, No special adaptor or fixture required

Operator Safety Roll Over Protection System (ROPS) Exceeds SAE J1524 and ISO Std 3471, Skydex

Impact Suspension Seating reduces G-force impact on rider 71%, 4 Point SFI-16-1 Certified Crew Seat Restraints, Platform System designed to meet

MIL-STD-882D (mission defined) specifications

Underbody Armor Full Coverage Skid Plate System

Front and Rear A-Arm Guards

Payload 1550 lb (exceeds 1:1 vehicle to weight ratio)

Lift/Tie Down Meets MIL-STD-209K/NATO 3548TN Specifications

Towing Capacity 3000 lb (terrain dependent)

Winch Warn XT40 4000 lb, with Wireless Remote Control

Wheels Double Reinforced Cast Aluminum Rims, All Wheels and Tires Same Size

Fuel Capacity 7.9 gal. (with optional in-line 8 gal. spare tank)

Ground Clearance 14.5"

Ford Depth 30" (without Optional Snorkel)

Wheel Base 76"

Track Width 51" front, 50" rear (center to center)

Overall Width 58" Length 114"

Height 68" (with convertible ROPS, 60")

Weight (dry) 1450 lb

Surface Finishes All Working Surfaces Industrial Powder Coated

*These specifications subject to change without notice. Prowler is built by the ATV Corp division of Phoenix International Systems, an AS 9100/ISO 9001:2008 Certified Manufacturer that is a Service Disabled Veteran Owned Small Business. The Prowler is available under GSA Contract No. GS-03F-0056T.





